



100 eco **naked** - SVR100ECO-NKD2400-DA2827060-BLK












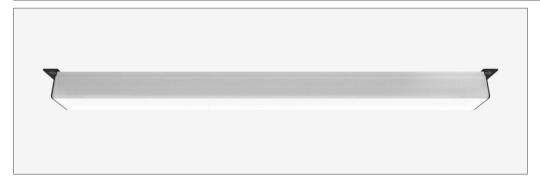



IK15 125 joules impact resistance

IP66 hermetically sealed light module cassette

AT06 security torx tamper-proof fasteners

100 eco naked range

product code SVR100ECO-NKD2400-DA2827060-BLK

description Aluminium mounting bracket with durable polyester powder coat finish

Impact-resistant UV-stabilised high-transmission polycarbonate light

module diffuser

Serviceable replaceable and upgradable light module cassette

Internal socket drive security-torx 304 stainless steel security fasteners Integral energy efficient Zhaga compliant Tridonic LED modules and power

supply unit

Direct-fix surface mounted 1.0 m circular flex connection warranty

7-year standard 10-year on application

country of origin

accreditations

DALI Alliance

EESS RCM

Australian Made and Owned

Australia

standards

applications highly robust surface mounted luminaire that enhances safety and security

in challenging environments. a durable construction ensures dependable operation and superior performance under harsh operating conditions; ideal for applications such as transportation, custodial, public areas, and secure

healthcare

AS/NZS 60598.2.1:2014 AS 60529-2004 IEC/EN 62262:2002+A1:2021

AS/NZS 60598.1:2017

ANSI/IES LM-79-19 ANSI/IES LM-80-21 ANSI/IES TM-21-21

polar curve







100 eco naked - SVR100ECO-NKD2400-DA2827060-BLK












driver

manufacturer Tridonic control interface DALI-2 dimming range 1 - 100 % switch-on time < 700 ms switch-off time < 50 ms rated lifetime > 100,000 h

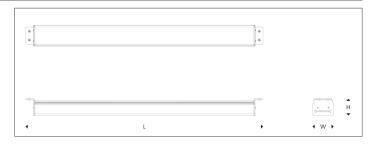

light source

manufacturer Tridonic

technology linear LFD module operating mode constant current

delivered lumens 4447 lm colour rendering index 80 correlated colour temperature 2700 K colour tolerance 3 SDCM CTI ≥ 600 V lumen maintenance [L80F10] > 72,000 h

dimensions [mm]

L - length 2340 105 W - width H - height 85

mounting

type surface mounted

direct-fix or wall bracket method

orientation horizontal or vertical burning position

electrical

220 - 240 V rated supply voltage 0 / 50 / 60 Hz mains frequency 39.97 W power consumption leakage current < 350 µA 22.4 A / 176 µs in-rush current

power factor [0.98 THD 6%

overvoltage protection 320 V AC / 48 h

mains surge protection [L-N] 1 kV mains surge protection [L/N-PE] 2 kV

mounting bracket

material aluminium security mounting bracket finish black texture polyester powder coat

light module cassette

material high-transmission + uv-stabilised extruded

polycarbonate [hermetically sealed]

translucent reeded finish

maximum circuit breaker loads

conductor size	1.5mm²		2.5mm ²		1.5mm ²		2.5mm ²	
circuit breaker type	C10	C13	C16	C20	B10	B13	B16	B20
luminaire quantity	10	14	18	22	6	8	11	13



sales@survivorlighting.com +61 2 9191 9800