

50 classic **surface** - SVR050CLA-SUR2100-DA2935080-WHT



- IK17** 175 joules impact resistance
- IP66** hermetically sealed light module cassette
- AT06** security torx tamper-proof fasteners

**country of origin**  
Australia

**range** 50 classic surface

**product code** SVR050CLA-SUR2100-DA2935080-WHT

**description**

- Heavy-gauge extruded aluminium mounting base with durable polyester powder coat finish and impact-resistant GRP security caps
- Impact-resistant UV-stabilised high-transmission polycarbonate light module diffuser
- Serviceable replaceable and upgradable light module cassette
- Internal socket drive security-torx 304 stainless steel security fasteners
- Integral energy efficient Zhaga compliant Tridonic LED modules and power supply unit
- Direct-fix surface mounted
- Internal stainless steel wire safety lanyards
- 1.0 m circular flex connection

**accreditations**

- Australian Made and Owned
- DALI Alliance
- EESS
- RCM

**warranty**

- 7-year standard
- 10-year on application

**standards**

- AS/NZS 60598.1:2017
- AS/NZS 60598.2.1:2014
- AS 60529-2004
- IEC/EN 62262:2002+A1:2021
- ANSI/IES LM-79-19
- ANSI/IES LM-80-21
- ANSI/IES TM-21-21

**applications** extremely robust surface mount luminaire that enhances safety and security in the most challenging environments. a durable construction ensures dependable operation and superior performance under harsh operating conditions; ideal for applications such as transportation, custodial, public areas, and secure healthcare


**polar curve**





**driver**

|                   |             |
|-------------------|-------------|
| manufacturer      | Tridonic    |
| control interface | DALI-2      |
| dimming range     | 1 – 100 %   |
| switch-on time    | < 700 ms    |
| switch-off time   | < 50 ms     |
| rated lifetime    | > 100,000 h |

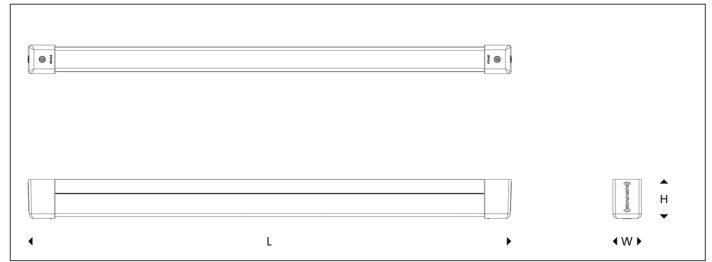

**light source**

|                               |                   |
|-------------------------------|-------------------|
| manufacturer                  | Tridonic          |
| technology                    | linear LED module |
| operating mode                | constant current  |
| delivered lumens              | 4378 lm           |
| colour rendering index        | 90                |
| correlated colour temperature | 3500 K            |
| colour tolerance              | 3 SDCM            |
| CTI                           | ≥ 600 V           |
| lumen maintenance [L80F10]    | > 72,000 h        |

**dimensions [mm]**

|            |      |
|------------|------|
| L - length | 2090 |
| W - width  | 72   |
| H - height | 99   |

**mounting**

|             |   |
|-------------|---|
| type        | surface                                 |
| method      | direct-fix or wall bracket              |
| orientation | horizontal or vertical burning position |

**mounting base + end caps**

|          |   |
|----------|---|
| material | extruded aluminium base + GRP security end caps |
| finish   | white texture polyester powder coat + white GRP |

**light module cassette**

|          |  |
|----------|--|
| material | high-transmission + uv-stabilised extruded polycarbonate [hermetically sealed] |
| finish   | clear reeded   |

**electrical**

|                                 |                 |
|---------------------------------|-----------------|
| rated supply voltage            | 220 – 240 V     |
| mains frequency                 | 0 / 50 / 60 Hz  |
| power consumption               | 46.64 W         |
| leakage current                 | < 350 µA        |
| in-rush current                 | 22.4 A / 176 µs |
| power factor [                  | 0.97            |
| THD                             | 8%              |
| overvoltage protection          | 320 V AC / 48 h |
| mains surge protection [L-N]    | 1 kV            |
| mains surge protection [L/N-PE] | 2 kV            |

**maximum circuit breaker loads**

|                      |                    |     |                    |     |                    |     |                    |     |
|----------------------|--------------------|-----|--------------------|-----|--------------------|-----|--------------------|-----|
| conductor size       | 1.5mm <sup>2</sup> |     | 2.5mm <sup>2</sup> |     | 1.5mm <sup>2</sup> |     | 2.5mm <sup>2</sup> |     |
| circuit breaker type | C10                | C13 | C16                | C20 | B10                | B13 | B16                | B20 |
| luminaire quantity   | 10                 | 14  | 18                 | 22  | 6                  | 8   | 11                 | 13  |